


Hybrid StepServo Motor



Order Coding : StepServo Motor

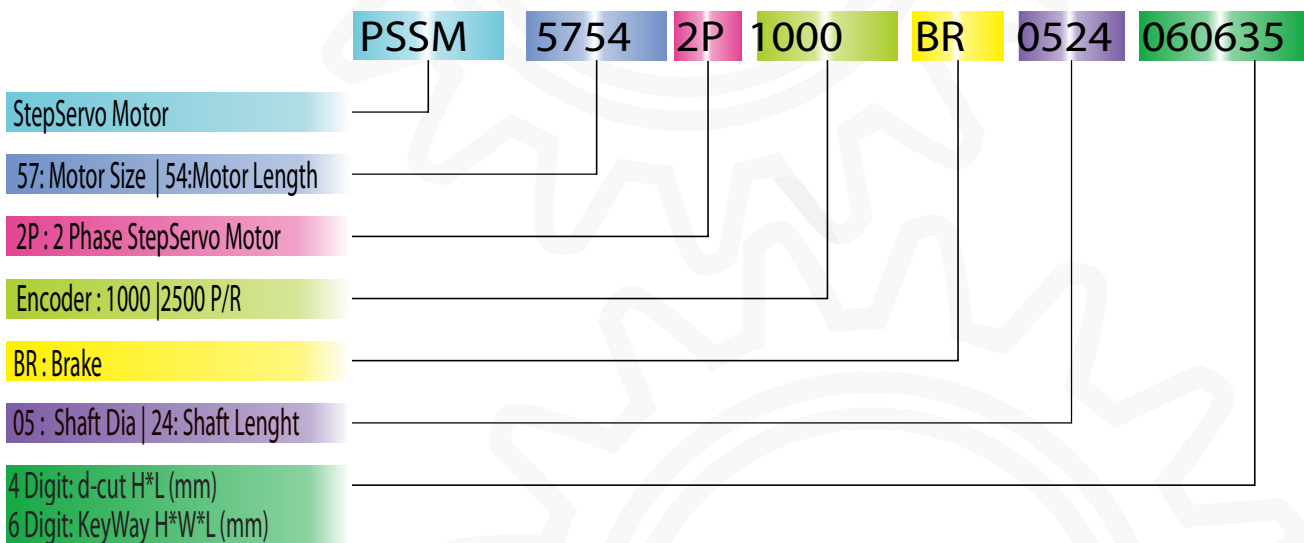

Model	Holding Torque (Nm)	Current/Phase (A)	Rotor Inertia (g-cm ²)	Weight (Kg)	Length Lmax (mm)	Flange Ø (mm)	Matching Drive
PSSM4248-2P	0.48	1.5	80	0.45	48	22	PSSD42-N-J-2P
PSSM4260-2P	0.7	2.5	110	0.55	60	22	PSSD42-N-J-2P
PSSM5754-2P	0.9	4.0	280	0.8	56	38.1	PSSD57-N-J-2P
PSSM5780-2P	2.0	5.0	480	1.2	76	38.1	PSSD57-N-J-2P
PSSM6056-2P	1.5	3.5	340	0.9	57	36	PSSD57-N-J-2P
PSSM6087-2P	3	5.0	690	1.45	85.6	36	PSSD57-N-J-2P
PSSM60100-2P	3.5	5.0	1200	1.9	100	36	PSSD57-N-J-2P
PSSM8680-2P	4.5	6.0	1400	2.4	80	73	PSSD86H-N-J-2P
PSSM8695-2P	6.5	6.0	2200	3.4	100	73	PSSD86H-N-J-2P
PSSM86118-2P	8.5	6.0	2700	3.9	114	73	PSSD9060AC-2P
PSSM86156-2P	12	6.0	4000	5.3	156	73	PSSD9060AC-2P